


A coloured pointing mortar for use with the webertherm XB External Wall Insulation System

weberend BPM

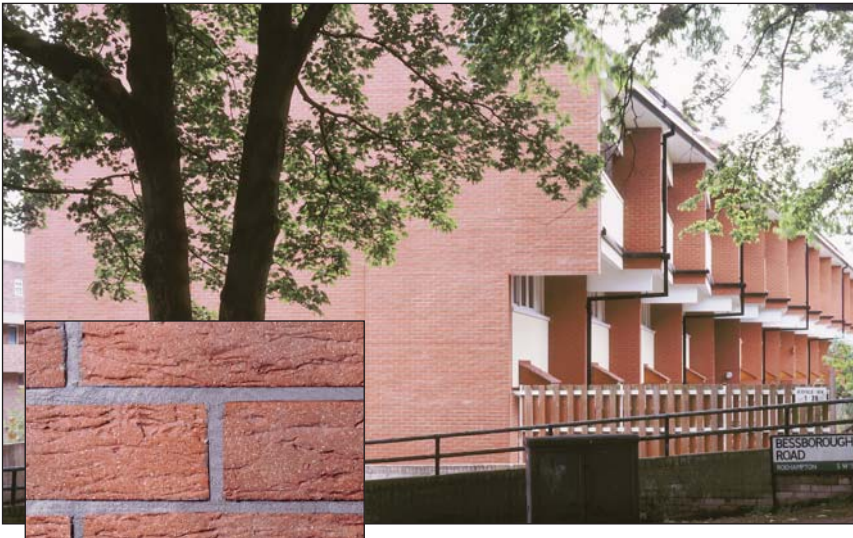

About this product

weberend BPM is a coloured, polymer-modified, dry powder, cement based mortar.

Technical data

External wall insulation systems – webertherm XB

Insulation Board	Reinforcement	Fixing	1st Coat	2nd Coat	Finish
EPS	N/A	Mechanical	weberend EXB	N/A	Brick slip and weberend BPM
PHS	N/A	Mechanical			
PIR	N/A	Mechanical			
MFD	Meshcloth	Mechanical	weberend LAC	weberend EXB	Brick slip and weberend BPM
MFL	N/A	weberend LAC	weberend EXB	N/A	Brick slip and weberend BPM

Uses

- As a coloured mortar for pointing the brick slips in a **webertherm XB** EWI system

Features and benefits

- ▲ Polymer modified for improved water shedding
- ▲ Pre-bagged mix reducing wastage with small manageable batches
- ▲ No colour tinting required on site
- ▲ Quality controlled and factory blended to give a consistently high quality product
- ▲ Practical benefits of smooth application, speed, economy and long shelf life

Colours

weberend BPM pointing mortar is available in one colour.

weberend BPM

Preparation

All surfaces must be sound, clean, dry and free from any material which may impair adhesion.

Scaffolding must be independently tied to allow uninterrupted application. Any faults in the structure, particularly those which may lead to moisture penetration, must be rectified.

Mixing and application

Mix **weberend BPM** to a workable consistency by adding clean water only.

Apply the pointing mortar carefully to the joints on the **webertherm XB** system using a special refillable cartridge gun with interchangeable nozzles.

To ensure colour consistency the material required for complete and adjoining panels should be of the same batch number.

Good practice

Do not apply:

- If frost is forecast within 24 hours of use
- In damp/wet conditions
- In temperatures below 5°C or above 30°C
- On elevations in direct sunlight or where the substrate is hot

Packaging

weberend BPM is packaged in 3-ply 25 kg bags with batch code and description on the side.

Coverage

Use	Nominal thickness	Coverage
Pointing	5 – 10 mm	3 kg/m ²

Note: This estimate takes no account of wastage.

Storage and shelf life

When stored unopened in a dry place at temperatures above 5°C, shelf life is 12 months from date of manufacture.

Health and safety

Contains cement (Contains chromium (VI). May produce an allergic reaction). Harmful by inhalation. Irritating to eyes and skin. Keep out of the reach of children. In case of contact with eyes, rinse immediately with plenty of water and seek medical help. After contact with skin, wash immediately with plenty of soap and water. Wear suitable protective clothing, gloves and eye/face protection.

For further information, please request the Material Safety Data Sheet for this product.

Technical services

Weber's Customer Services Department has a team of experienced advisors available to provide on-site advice both at the specification stage and during application. Detailed specifications can be provided for specific projects or more general works. Site visits and on-site demonstrations can be arranged on request.

Technical helpline
Tel: 08703 330 070
e-mail: technical@netweber.co.uk

Sales enquiries

Weber products are distributed throughout the UK through selected stockists and distributors. Please contact the relevant Customer Services Team below for all product orders and enquiries.

UK and Ireland
Tel: 08703 330 070
Fax: 0800 014 2995
e-mail: sales@netweber.co.uk

Saint-Gobain Weber
Dickens House, Enterprise Way, Maulden Road, Flitwick, Bedford MK45 5BY, UK
Tel: 08703 330 070 Fax: 0800 014 2995 e-mail: mail@netweber.co.uk
www.netweber.co.uk

To the best of our knowledge and belief, this information is true and accurate, but as conditions of use and any labour involved are beyond our control, the end user must satisfy himself by prior testing that the product is suitable for his specific application, and no responsibility can be accepted, or any warranty given by our Representatives, Agents or Distributors. Products are sold subject to our Standard Conditions of Sale and the end user should ensure that he has consulted our latest literature.