


A factory batched, through-coloured mortar for use as a render top coat

weberend TTS

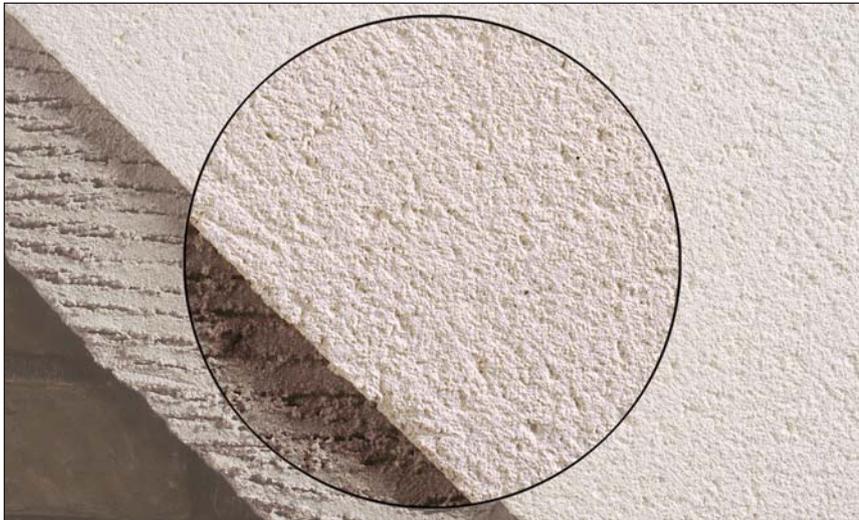

Uses

- Cost-effective through-coloured decorative top coat to achieve a wide range of design options.
- Can be used in **Weber** render protected, external wall insulation systems and in multi-coat render systems (see table below).

When used in strict accordance with manufacturer's instructions and within an appropriate system, **Weber** renders will have a minimum life of 10 years.

Constraints

The quality of application of this material depends on suitable operative skills and product familiarity.

Restrictions on weather conditions during application and curing must be respected.

Sound trade practices and printed instructions must be followed.

Good access and appropriate protection must be provided.

About this product

weberend TTS is a factory batched, through-coloured top coat mortar most suited to scrape texturing.

Technical data

External wall insulation systems – webertherm XL

Insulation Board	Reinforcement option	Fixing	1st Coat	2nd Coat	Finish
MFD PIR EPS	Ferritic stainless lath	Mechanical	weberend PUC	weberend TTS	Scrape texture
			weberend PUC		

Multi-coat render systems

Preparation	Reinforcement option	Fixing option	1st Coat	2nd Coat	Finish
Membrane or weberend stipple	Ferritic stainless lath	Mechanical	weberend PUC	weberend TTS	Scrape texture
Keyed surface	N/A	N/A	weberend PUC or weberend TUC	weberend TTS	Scrape texture

Features and benefits

- ▲ Exceptional and consistent quality
- ▲ Durable textured finish requiring no painting
- ▲ Available in a range of 10 pastel colours
- ▲ Established track record in varying climatic conditions
- ▲ Forms part of an approved insulation system



Colours

weberend TTS is available in a range of 6 colours. Specifiers should obtain samples prior to specification. A colour card is available at www.netweber.co.uk

weberend TTS

Mixing

Mix **weberend TTS** by adding clean water only to achieve workability. This mortar can be made up in any batch size desired with little wastage because it is pre-mixed dry.

Add no other material unless directed. Wet down scratched undercoat surface with water spray, as required, to control suction.

To ensure colour consistency, the materials required for complete and adjoining panels should be of the same batch number or be thoroughly mixed together before use.

Application

Apply **weberend TTS** 8 – 10 mm thick to prepared undercoat. Float finish to produce a smooth even surface plane. Use a 'derby' if necessary to produce even thickness and flatness. When mortar has taken up sufficiently after several hours drying (usually the following day) and when larger stones spring easily from the surface, texture the surface using a scratching pad to produce an even appearance. The pad is used lightly in a circular motion. Remove all surface 'glut' and scratch the entire surface, taking care not to miss areas.

When completed, **weberend TTS** should have a minimum thickness of 6mm. Take care not to damage the surface, especially at corners and with scaffolding or ladders.

Carefully brush down the surface of the scraped finish using a soft bristle brush.

Arrises can be dealt with:

- Using a mitred rule, which is slow and needs skill, but is very effective.
- Using rigid PVC corner beads.

Good practice

Do not apply:

- If frost is forecast within 24 hours of use
- In damp/wet conditions
- In temperatures below 5°C or above 30°C
- On elevations in direct sunlight or where the substrate is hot

Packaging

weberend TTS is packaged in plastic-lined 25kg bags with batch code, description and colour (where appropriate) on the side.

Coverage

Finish type	Nominal thickness	Coverage
Scraped	6 mm (finished)	16 kg/m ²

Note: This estimate takes no account of wastage and will vary according to the type of surface involved.

Storage and shelf life

When stored unopened in a dry place at temperatures above 5°C, shelf life is 12 months from date of manufacture.

Health and safety

Contains cement (Contains chromium (VI)). May produce an allergic reaction. Harmful by inhalation. Irritating to eyes and skin. Keep out of the reach of children. In case of contact with eyes, rinse immediately with plenty of water and seek medical help. After contact with skin, wash immediately with plenty of soap and water. Wear suitable protective clothing, gloves and eye/face protection.

For further information, please request the Material Safety Data Sheet for this product.

Technical services

Weber's Customer Services Department has a team of experienced advisors available to provide on-site advice both at the specification stage and during application. Detailed specifications can be provided for specific projects or more general works. Site visits and on-site demonstrations can be arranged on request.

Technical helpline

Tel: 08703 330 070
e-mail: technical@netweber.co.uk

Sales enquiries

Weber products are distributed throughout the UK through selected stockists and distributors. Please contact the relevant Customer Services Team below for all product orders and enquiries.

UK and Ireland

Tel: 08703 330 070
Fax: 0800 014 2995
e-mail: sales@netweber.co.uk

Saint-Gobain Weber

Dickens House, Enterprise Way, Maulden Road, Flitwick, Bedford MK45 5BY, UK
Tel: 08703 330 070 Fax: 0800 014 2995 e-mail: mail@netweber.co.uk
www.netweber.co.uk

To the best of our knowledge and belief, this information is true and accurate, but as conditions of use and any labour involved are beyond our control, the end user must satisfy himself by prior testing that the product is suitable for his specific application, and no responsibility can be accepted, or any warranty given by our Representatives, Agents or Distributors. Products are sold subject to our Standard Conditions of Sale and the end user should ensure that he has consulted our latest literature.